

SLIM D

Frame

Height-adjustable Frame
from 650 to 850z mm in 20 mm increments, with
the following cross sections: external pipe
diameter 60 mm x 2 mm thick, INOX inner tube
diameter 50 mm x thickness 2 mm

Surface


Chipboard with veneer
coating 25mm thick

Restorers


For smoothing floors 0-
25mm

Support frame

Steel tube (INOX or electrostatic
paint) of 40 mm x 1.5 mm in
diameter.

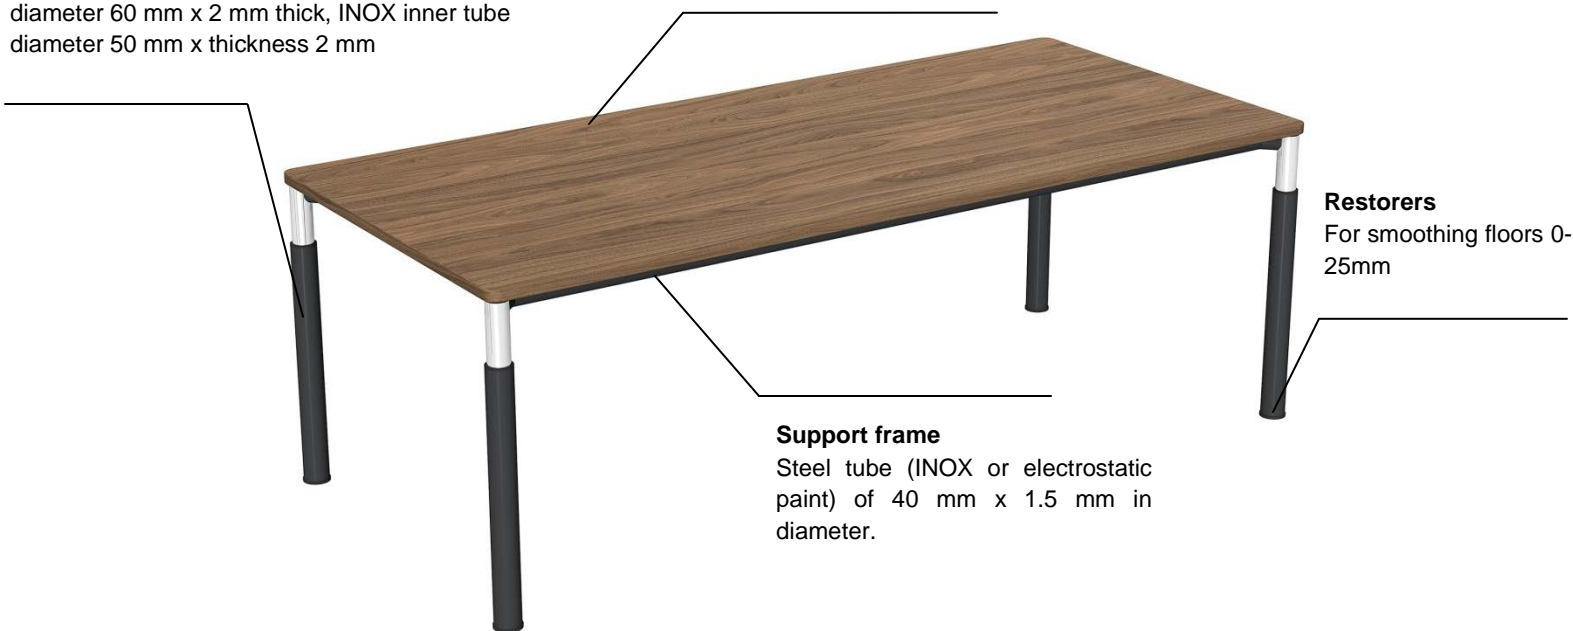

Dimensions

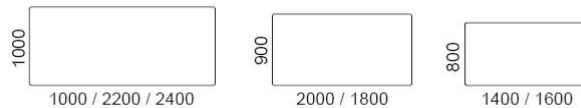



The Slim office line was designed to build innovative products with an emphasis on environmental protection. Designed according to the standards and rules of the European Union, emphasizing the new ecological corporate philosophy, the impact of the current human development on the environment and the requirements of the modern professional space

COLOR CHART

Veneer surface



Metallic frame



CERTIFICATES

DIN Fachbericht
147/01.06
EN 527-1:2011
EN 527-2:02
EN 527-3:03
ZEK 01.2-08/12.08

